

THANK YOU FOR YOUR TRUST AND CHOOSING THE EMPOL BRAND


A FEW TIPS FROM AN EXPERIENCED MANUFACTURER

- We do not leave the wing open during strong winds.
- No additional forces may be exerted on the profil.
- Do not block the open sash by placing objects between the sash and the frame.
- Contact of the window with hot objects, adhesives, paints and solvents may damage the profile surfaces.
- The installation of additions to the profile causes the loss of thermal properties and the loss of the warranty in this regard.
- Do not maneuver the handle when the sash is open or tilted.
- Before starting plastering works, carefully protect the window sashes with stretch foil or paint foil. Fittings are particularly sensitive, as they wear more quickly when sand or plaster gets into them.
- The protective foil covering the profile should be removed within one month of installing the windows. The foil only serves to protect the profiles during transport and production.

Original Empol windows, even after their installation, can be equipped with additional, useful functions. You can find more on our website: www.empol.pl


MAINTENANCE AND ADJUSTMENT OF WINDOW HARDWARE

- Greasing the fittings once a year and adjusting them if necessary, significantly extends their service life and ensures comfort of use.
- Moving parts and their places of cooperation are greased with a special oil or petroleum jelly, vacuuming them first if they are dirty.
- We adjust the hardware only when it is necessary.
- The reason for making the adjustment may be the rubbing of the wings as a result of their natural settling and the operation of the new building.
- To adjust the hinges, we use a size 4 Allen key, taking care to carefully and deeply insert it into the adjustment socket.
- The sash pressure against the frame is regulated by turning the pressure roller with the handle in the "open sash" position.

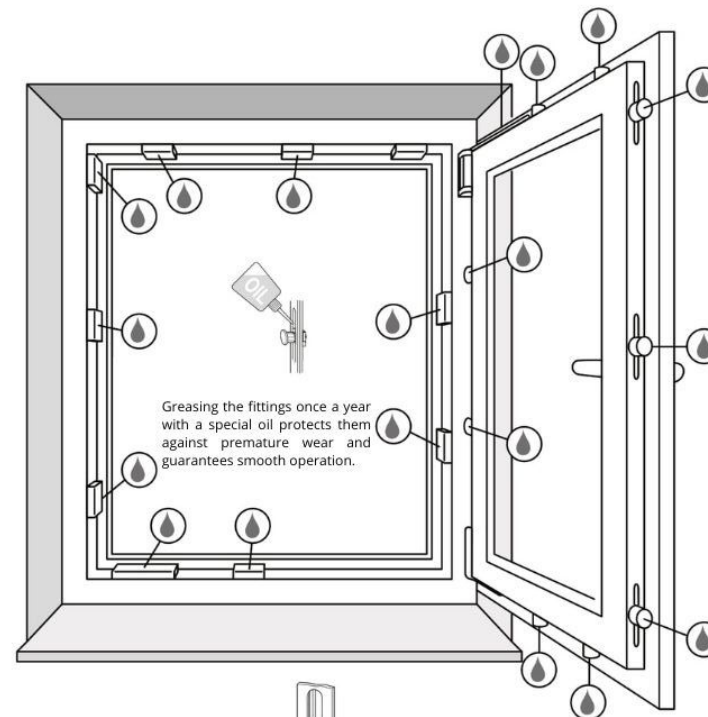


Pressure adjustment

The octagonal locking mushroom enables the sash pressure to be adjusted to the frame with a special key (activ HV 11, cut-out 7.8). This way you can reduce the pressure in summer and increase it in winter. Adjustments are made in the open window.



Installation and repair works, i.e. adjustment of fittings with the use of tools, replacement of worn or damaged fittings, as well as suspension and removal of the sash from the frame, should be performed by qualified personnel.

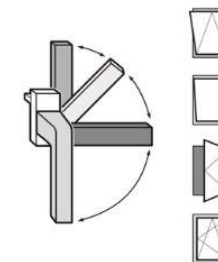

CAUTION!
The removal and hanging of the sash in the frame may only be performed by qualified personnel.

